

alca

Plumbing SYSTEMS


6 April 2023



A491CR 8595580523749

Shower waste set chrome 90mm stainless steel grid Flow rate 37,2L 1/min. Ø90

To drain the water from the shower trays. For shower trays with a drain outlet Ø90 mm. For shower trays without overflow
Self-cleaning design of trap. Fully cleanable up to the waste pipe, Reduced installation height 65 mm. Direct connection to HT (after cutting)
Simple fitting of the waste and trap covers. Material: polypropylene, thermally and chemically resistant, longitudinally welded
•Flowrate: 37,2 l/min. Thermal resistance: 95. °C Odour trap: 30 mm EN 274

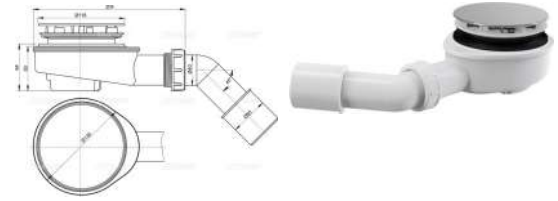

A47CR-60 8594045930221

Shower waste and trap chrome 60mm stainless steel grid Flow rate 49L 1/min.

•To drain the water from the shower trays •For shower trays without overflow •For shower trays with a drain outlet Ø60 mm
•Material: polypropylene, thermally and chemically resistant, longitudinally welded •Waste can be connected using elbow A52 •Self-cleaning design of trap •Building height 79 mm •Removable basket for debris
•Flowrate: 49 l/min •Thermal resistance: 95 °C •Odour trap: 50 mm EN 274



A48 8594045930603

Shower waste and trap with stainless steel grid chrome Flow rate 43L 1/min. Ø90


•To drain the water from the shower trays •For shower trays without overflow •For shower trays with a drain outlet Ø90 mm
•Material: polypropylene, thermally and chemically resistant, longitudinally welded •Waste can be connected using elbow A52 •Fully cleanable up to the waste pipe •Building height 84 mm
•Flowrate: 43 l/min •Thermal resistance: 95 °C •Odour trap: 50 mm EN 274



A49CR 8594045930627

Shower waste and trap with stainless steel grid chrome Flow rate 43L 1/min.

•To drain the water from the shower trays •For shower trays without overflow •For shower trays with a drain outlet Ø90 mm
•Material: polypropylene, thermally and chemically resistant, longitudinally welded •Waste can be connected using elbow A52 •Fully cleanable up to the waste pipe •Building height 84 mm
•Flowrate: 43 l/min •Thermal resistance: 95 °C •Odour trap: 50 mm EN 274

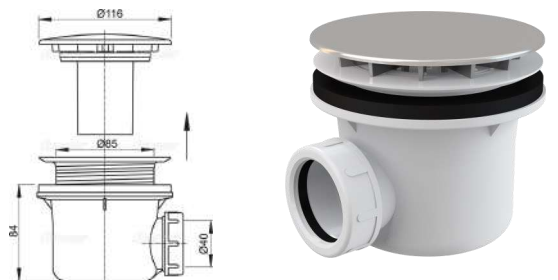

DN90

Cover DN90 White for A491CR/A49CR

S0053

White cover A491CR & A49CR



S0852-ND DN90

Cover for A49CR


S0035-ND DN60

Cover for A47CR

A991-20 8595580542085

WC connectors eccentric 20 mm


For connecting the toilet to the sewage pipe – diameter 110 mm
 Material soft PVC
 Packaging – bag : 1 pcs
 size – bag : 140×150×125 mm
 weight – bag: 0.213 kg

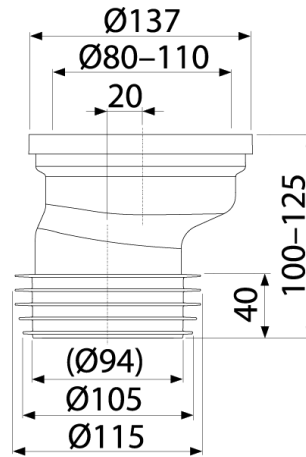

A991-40 8595580542092

WC connectors eccentric 40 mm


For connecting the toilet to the sewage pipe – diameter 110 mm
 Material soft PVC
 Packaging – bag : 1 pcs
 size – bag : 140×150×125 mm
 weight – bag: 0.216 kg

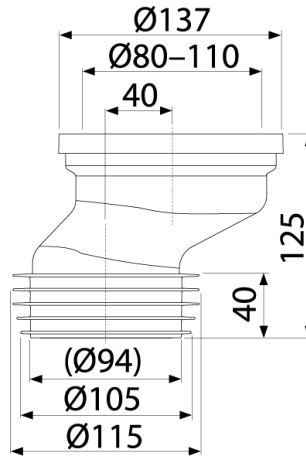

A45B 8594045937596

Urinal trap horizontal outlet


urinal trap built-in
 waste pipe – diameter 40 mm
 trap with seal for connection to urinal
 packing - outer box: 25pcs
 size - outer box: 590×390×240 mm
 weight - outer box: 5.1kg

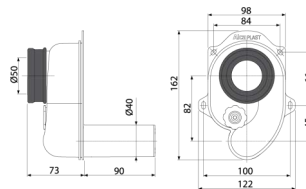

A400BLACK 8595580558673

Wash-basin trap design dn32, black-matt


For wash-basin
 Customs code: 74182000
 Odour trap 50 mm
 Flow rate: 30 l/min
 Connection to waste pipe Ø32 mm, High scratch resistance, Color: black-matt, Material: chrom-plated brass with black-matt finish
 EN 274

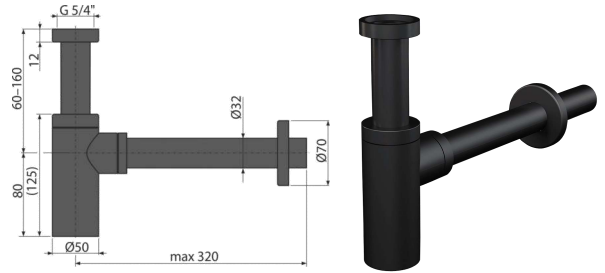

A400 8594045937589

Wash-basin trap design dn32, chrome

For wash-basin
 Customs code: 74182000
 Odour trap 50 mm
 Flow rate: 30 l/min
 Connection to waste pipe Ø32 mm, High scratch resistance, Color: chrome, Material: chrom-plated brass
 EN 274

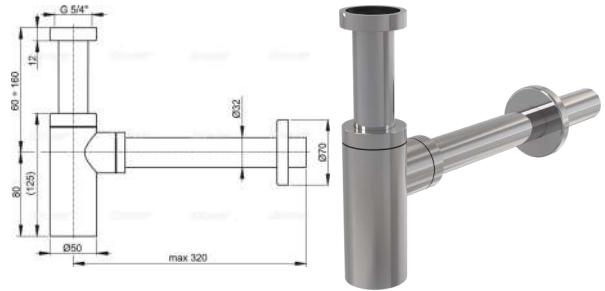

A431 8594045930665

Wash-basin trap DN32 with coupling nut 5/4", metal


Connection to waste pipe Ø32 mm
 High scratch resistance
 Material: chrome-plated brass
 Odour trap 50 mm
 Flow rate 34 l/min
 Thermal resistance 95 °C
 EN 274



A430 8594045935547

Wash-basin trap Ø32 with coupling nut 5/4"

For wash-basin
 Connection to waste pipe Ø32 mm
 polypropylene
 Flow rate - 38 l/min, Thermal resistance - 95 °C,
 Odour trap -58mm
 EN 274

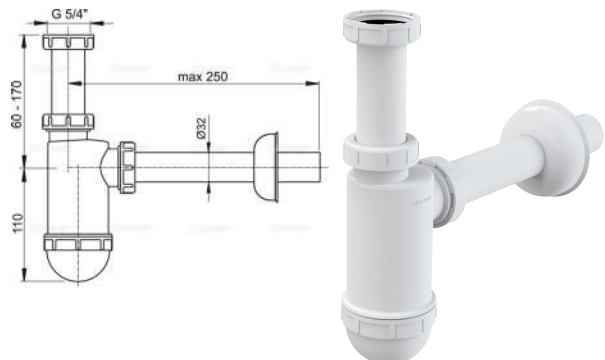


A507BLACK 8595580558697

bath click/clack waste and trap, black-matt

Odour trap: 43 mm, Flow rate: 48,6 l/min, Overflow flow rate: 42 l/min, Resistance of odour trap against the pressure: 588 Pa, Thermal resistance: 95 °C

Bath waste and overflow system, Wet odour trap with swivel elbow, Closing waste by CLICK/CLACK, Overflow flexi pipe, Reduced installation height, The length of the bathtub trap 57 cm, Color: black-matt, Material: metal with black-matt finish, Easy clean trap – thanks to completely removable waste outlet EN 274

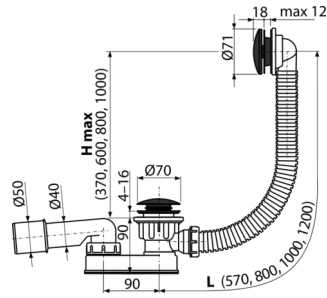

A504KM

**Plug kit
S0986-ND+S0513-ND+S1015-ND**

A434 8595580503086

space-saving wash-basin trap with coupling nut 5/4"


For wash-basin To save space under the wash-basin

Odour trap 64 mm, Flow rate 60 l/min,

Thermal resistance 95 °C

Connection to waste pipe Ø40 mm

Material: polypropylene

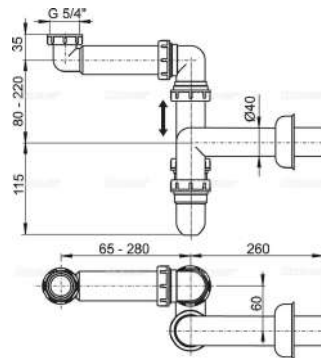


Wash-basin click/clack waste

alca


A392C 8595580561543

Wash-basin click/clack waste 5/4", metal, big plug with overflow
Long life CLICK/CLACK mechanism
Material: chrome-plated brass
Highly resistant to mechanical damage
Thread for connection to wash-basin trap 5/4"
Easy clean trap – thanks to completely removable waste outlet thread 5/4"

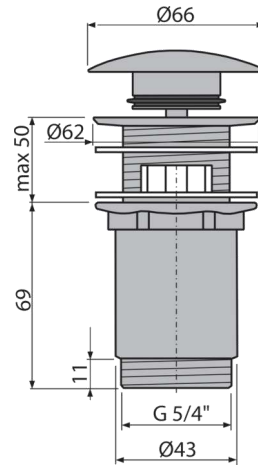


A392B 8595580539351

wash-basin click/clack waste 5/4" metal with overflow, big white plug
For wash-basin with overflow
Thread 5/4 - "
Thread for connection to wash-basin trap 5/4"
The surface is resistant to mechanical damage
Long life CLICK/CLACK mechanism
Material: chrome-plated brass

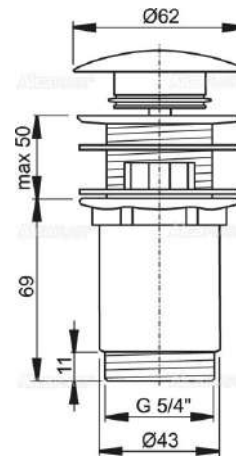


A392BLACK 8595580558666

wash-basin click/clack waste 5/4", metal with overflow, big black plug
For wash-basin with overflow
Thread 5/4 "
Thread for connection to wash-basin trap 5/4"
Highly resistant to mechanical damage
Long life CLICK/CLACK mechanism
Material: chromed brass coated black-mat

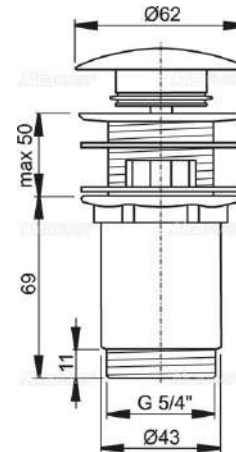

A392-G-P 8595580571665

Wash-basin CLICK/CLACK waste 5/4" metal with overflow, big plug, GOLD-polished
For wash-basin with overflow
Thread 5/4 "
Thread for connection to wash-basin trap 5/4"
The surface is resistant to mechanical damage
Long life CLICK/CLACK mechanism
Easy clean trap – thanks to completely removable waste outlet
Material: brass with PVD surface finish

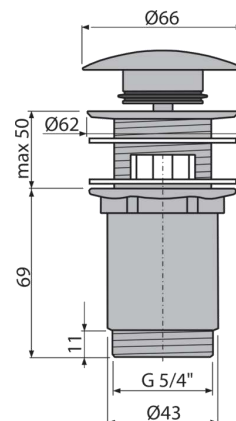

Wash-basin click/clack waste


alca

A395

8595580500344

Wash-basin click/clack waste 5/4", metal, big plug

For plastic and glass wash-basins, without overflow
For plastic and glass wash-basins
For wash-basins with overflow to trap
Long life CLICK/CLACK mechanism
Material: chrome-plated brass
Highly resistant to mechanical damage
Thread for connection to wash-basin trap 5/4"
thread :5/4"

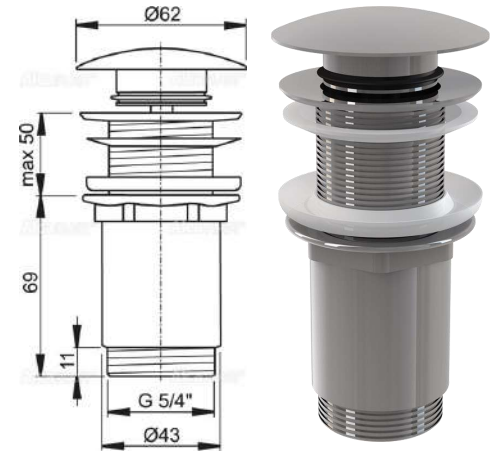

A395B

8595580539368

wash-basin click/clack waste 5/4" metal without overflow, big white plug, for plastic and glass wash-basins

For plastic and glass wash-basin, with overflow to trap
Thread 5/4 - "
Thread for connection to wash-basin trap 5/4"
The surface is resistant to mechanical damage
Long life CLICK/CLACK mechanism
Material: chrome-plated brass



S1542-ND

Click clack mechanism

AC392/A504CKM/A507CKM




alca shop.

A160P-3/8

8595580566746

Side inlet fill valve metal thread for plastic prewall wc cisterns

For plastic cisterns and pre-wall installation systems, For replacement, For installation on the side of the cistern. Acoustic group I <20 dB. Working range 0,05 – 1,6 MPa Recommended operating pressure 0,5 – 0,8 MPa. Thread diameter 3/8 ". Compatible with pre-wall installation systems Alcaplast range A, Metal thread length 22 mm, Built-in filter to trap dirt, Smooth closing without any shocks, Adjustable water level, Low sensitivity to the changing pressure in the water main.

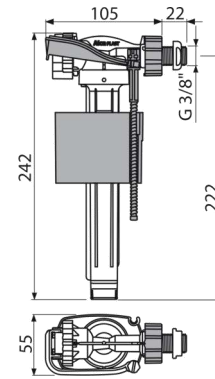


A160UNI

8595580570644

Universal valve for plastic and ceramic flushing cisterns includes 3/8 and 1/2 inch metal thread

Universal valve for plastic and ceramic flushing cisterns For replacement For installation on the side of the cistern For pre-wall installation systems

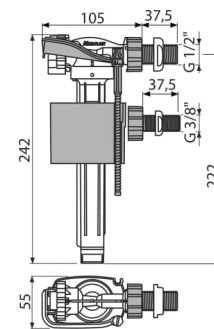


A08A

8595580532772

Flush valve with DUAL control button

For ceramic flushing cistern. For replacement, The design allows optimum height adjustment of the valve according to the height of the cistern, DUAL flush mechanism 3/6 l, STOP button to adjust the amount of discharged water, Option of the setting the button off the axis of the valve DUAL button chrome, Material: ABS Height adjustment range 315 – 450 mm, Functional requirements class I Flush volume of single flushes is determined by the size and the volume of the tank, Norms EN 14055

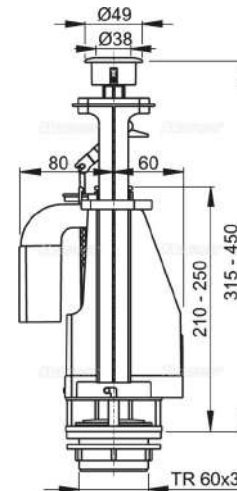

A18-3/8"


8594045931631

A18-1/2"

8594045931624

Bottom inlet fill valve metal thread


For ceramic flushing cistern, For replacement To install into the bottom of the cistern Metal thread length 39 mm, Built-in filter to trap dirt Smooth closing without any shocks, Adjustable water level Low sensitivity to the changing pressure in the water main The design allows optimum height adjustment of the valve according to the height of the cistern, Material: ABS Acoustic group II <30 dB Working range 0,05 – 0,8 MPa Recommended operating pressure 0,5 – 0,8 MPa Height adjustment range 265 – 345 mm Thread diameter 3/8 ", 1/2", Norms EN 14124

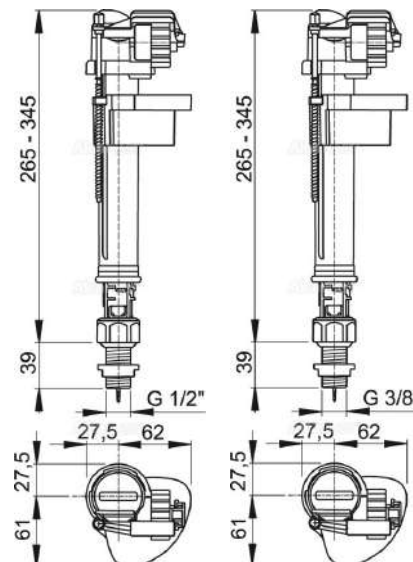

A93-3/8" 8595580501280

Universal WC cistern ALCA UNI DUAL


For installation on plaster
 For mounting as high, medium and low-lying
 The cistern is isolated against condensation, Water supply from left / right
 Universal brackets with their spacing and shape are consistent with existing tanks
 Volume 8 l with a large variety of settings for the flushing water volume
 Flushing DUAL 3/6 l, Water saving setting
 Design solution ensures the comfort when flushing even for children and handicapped people, Material: ABS
 Functional requirements class I
 Big flush 5,5 – 8 l, Small flush 2,5 – 3,5 l
 The default setting of large flush 6 – l, The default setting of small flush 3 – l
 When installed in a high rise position the tank is functional only with the big flush 6-8 l
 Acoustic group II <30 dB, Working range 0,05 – 0,8 MPa
 Recommended operating pressure 0,5 – 0,8 MPa
 EN 14124, EN 14055

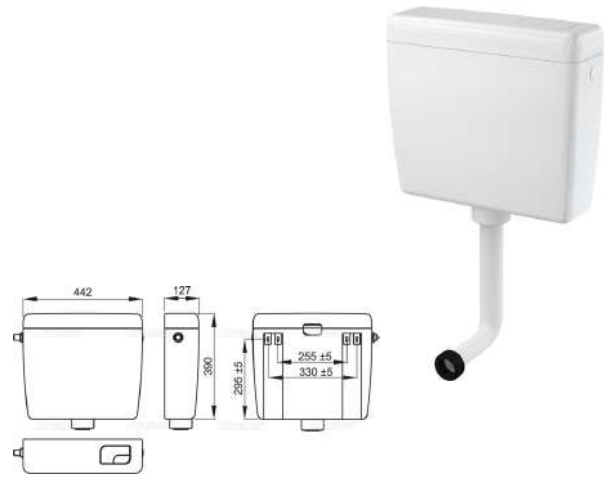

A52 8594045930696


ELBOW 45°

For shower wastes and traps
 For bath wastes and traps in combination with A53 6/4 "
 Connection to waste pipe Ø40/50 mm
 Material: ABS

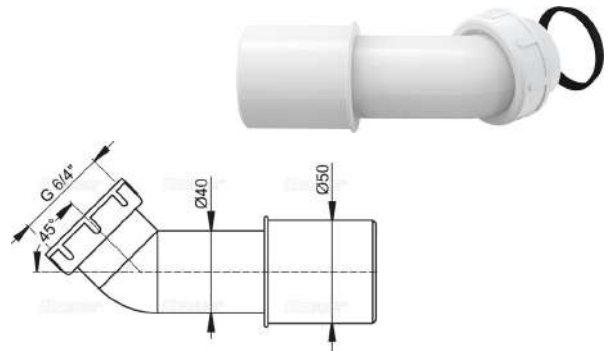


P148Z 8595580544973

Double connectors
 G1"/ 17-23mm
 with return valve

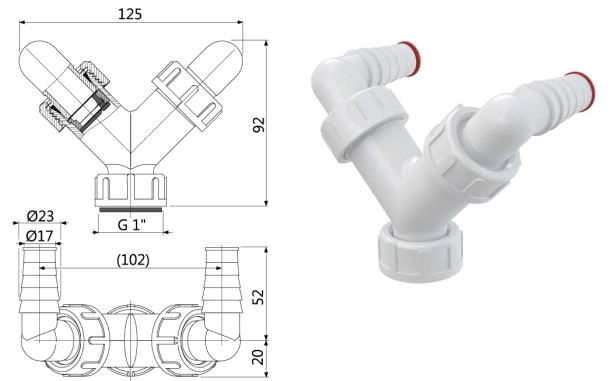

APS2 8594045933703

External washing machine trap white
 to connect the washing machine or dishwasher

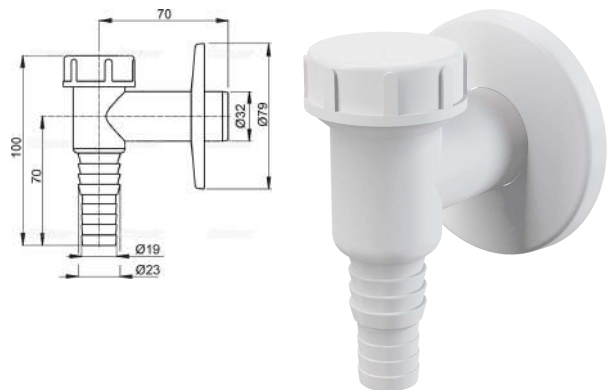

M956 Flexible waste pipe holder

alca